Distributed by

SOVEREIGN MEDICAL, INC

919-644-1113 sovmed.com





Product Brochure





The Ventway's unique combination of high-performance, functionality, and compact design, position it among the top emergency and transport ventilators.

Designed to be impact resistant, ultra portable and user-friendly, the Ventway Sparrow enhances the standard of care in both Field and Combat medicine. Ventway enables effective ventilation from the point of injury all the way to the ICU while using just one ventilator.



UltralightEasy to carry and handle



Maintenance Free

Durable and reliable device that delivers continuous ventilation, and only requires periodic filter replacement



Multifunctional

Hospital performance in the field

Ventway Sparrow

P/N: VWSP-100

Dimensions: 165×167×60 mm | Weight 1 kg



Performance Data

Ventilation Modes	SIMV-VC-PS, SIMV-PC, CPAP, HFNC A, CPR Mode A
Adult & Pediatric	Patient Weight >5 Kg (11 lb)
Respiratory Rate	1 – 60 ± 1 bpm
Peak Inspiratory Pressure	0-60 cm H₂0
Tidal Volume	50-2000 mL ±10% + 4 mL
Inspiratory Pressure Limit	11 to 60 cm H₂O ± 2 cm H₂O or 10% whichever is greater
Inspiratory Time	0.3 to 4 ± 10% sec
I:E Ratio	1:4 to 4:1
Peak Flow (PIF)	Mandatory breaths: 135 L/min (-5% to +10%) Spontaneous breaths: 160 L/min ± 10%
Oxygen Mix (FiO ₂)	21% to 95% ± 5% O ₂
PEEP	0 to 20 cm H2O ± 1, (externally adjusted)
Trigger Sensitivity	-0.25 to -10 cm H ₂ O Pressure, Off
Pressure Support Limit	11 to 50 cm H ₂ O above PEEP ± 2 cm H ₂ O
Pressure Alarm Limit	10 to 55 cm H ₂ O above PEEP ± 2 cm H ₂ O
FiO ₂ Low Pressure Enrichment	21% to 100% (low and high pressure oxygen source)
Altitude	-1200 ft up to 25,000 ft

Power Specifications

Rechargeable Battery Pack	Li 2850 mAh
Non-Rechargeable Battery Pack	Li 3000 mAh
External AC-DC Adaptor	100~264VAC 50/60Hz
External DC-DC Adaptor	18~28VDC 4A max

Ventway Sparrow Packaged

P/N: VWSP-1000



Ventway Sparrow	AC/DC Power Adapter	Rechargeable Battery	Ventway Sparrow IFU
VWSP-100	VWSP-141	VWSP-420	VWSP-500

Major Standards

IEC 60601-1, IEC 60601-1-2, IEC 60601-1-12, ISO 80601-2-12, ISO 10651-3, EN 794-3, RTCA DO 160G, EN 1789, IP 45 (with oxygen).



Patient Circuit | Adult (2)



Dimensions

Nominal Overall Length	180 / 240 cm
Internal Volume	690 / 920 CC
Inspiratory Resistance to Flow	2.7 cmH₂O @ 60 lpm
Dead Space	31 cc
Circuit Compliance	0.001 L/cmH₂O
Corrugated Tube Diameter	22 mm
Delivered Tidal Volumes	Tv > 200 cc

Patient Circuit | Pediatric (2)

P/N: VWSP-1550F/1390

Dimensions

Nominal Overall Length	180 / 240 cm
Internal Volume	318 /424 CC
Inspiratory Resistance to Flow	2.1 cmH₂0 @ 30 lpm
Dead Space	29 cc
Circuit Compliance	0.0008 L/cmH ₂ O
Corrugated Tube Diameter	15 mm
Delivered Tidal Volumes	50 ml < Tv < 200 cc

VENRICHMENT

Oxygen Mixer

P/N: VWSP-580

Dimensions:

General	150x90x70mm
FiO_2	30%-95% O ₂
High Pressure	40-60 psi







Oxygen Enrichment Kit

P/N: VWSP-304

Dimensions

Folded	550x90x30 mm
Un-folded	1200x50x30 mm
O ₂ Tube Length	1800 mm
Maximal O ₂ Flow	25 lpm



DISS-DISS Oxygen Tube (green)

P/N: VWSP-590

Dimensions:

In Bag	150x150x40 mm
Nominal Length	1850 mm
Inner core	Medical grade PVC Braid reinforced polyester
Outer Cover	Solid-colored PVC
Working Pressure	200 psi max. @ 70°
Minimum Bend Radius	3 inches
Working Temperature	-5°C to 65°C
Color	Green



DISS-DISS Oxygen Tube (white)

P/N: VWSP-591



DISS-DIN Oxygen Tube (white)

P/N: VWSP-592



DISS-AGA Oxygen Tube (white)

P/N: VWSP-593

POWER SUPPLY & BATTERIES

DC Cable -Without Input Terminal


P/N: VWSP-929

* An adaptor can be provided based on customer's requirements



P/N: VWSP-141

Dimensions:

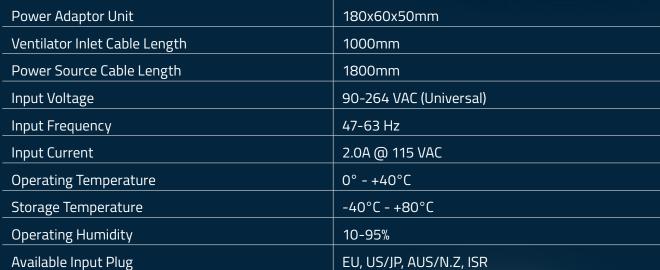

DC/DC Car Power Adaptor

P/N: VWSP-142

Dimensions:

Power Adaptor Unit	180x80x50mm
Ventilator Inlet Cable Length	1000mm
Power Source Cable Length	1800mm
Input Voltage	90-264 VAC (Universal)
Input Frequency	47-63 Hz
Input Current	2.5A @ 115 VAC
Operating Temperature	0°C - +40°C
Storage Temperature	-40°C - +80°C
Operating Humidity	10-95%
Available Input Plug	EU, US/JP, AUS/N.Z, ISR










Rechargeable Battery

P/N: VWSP-420

Dimensions:

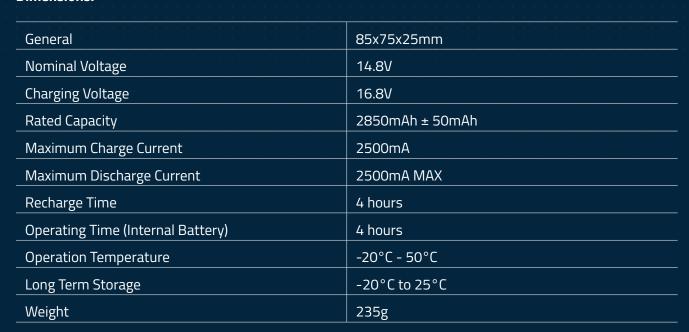

Non-Rechargeable Battery

P/N: VWSP-430

Dimensions:

General	85x75x25mm
Nominal Voltage	12V
Rated Capacity	3000mAh
Standard Discharge	20Ma ± 50mAh
Maximum Discharge Current	3000mA
Operating Time	3 hours
Operation Temperature	-20°C - 50°C
Storage Temperature	-20°C - 35°C
Weight	175.5g








HME Filter

P/N: VWSP-305

Dimensions:

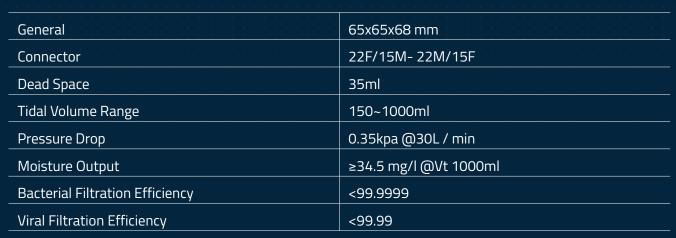

▲ Not available for sale in the USA

Bacterial/Viral Filter

P/N: VWSP-306

Dimensions:

General	65x65x68 mm
Connector	22F-22M
Compressible Volume	65ml
Pressure Drop at 30 LPM	1cmH20
Bacterial Filtration Efficiency	99.99+%
Viral Filtration Efficiency	99.99+%

▲ Not available for sale in the USA

Filter Pack P/N: VWSP-810

Internal filters for the ventilator - 5 Pieces







Hard Carrying Bag

P/N: VWSP-920*

Unbreakable yet lightweight, a transport and storage case suited for the harshest environments.

Dimensions:

Case Weight	2.8 kg
External	475 x 376 x 178mm
Internal	432 x 300 x 163mm
Water & Dust Resistance	IP67

^{*} Customized based on territory and MOQ

Soft Carrying Bag

P/N: VWSP-910

Dimensions:

General	180x190x100mm

Built from medical grade materials this soft carrying bag is designed for maximum efficiency during treatment.

* Can be carried by hand/on the shoulder/attached to a stretcher.

Not Berry Amendment compliant

Mounting System for Ventway Sparrow

P/N: VWMNT-200



The VWMNT-200 is a multi-functional mounting system specially designed with integrated connectors for power and oxygen supply. This provides quick access and ease of operation, enabling you to move with your ventilator and transfer your patients safely and quickly from one place to another without compromising the continuity of care.

Product Highlights: • Highly durable • Compatible with the highest standards EN-794; EN-1789 (SAE J3043 Certification in process) • Automatic connection to a power supply • Seamless connection to an oxygen supply • Single button quick release mechanism • Easily mounted on any surface • Multifunctional design to increase flexibility in EMS/CCT Transport protocols • Overall dimensions: Width: 205 mm, Depth: 210 mm, Height: 88 mm





Lubo

Lubo

INV-02-000-IT-7040-02

Mini Lubo

INV-03-000-IT-7040-01

First-Responders Airway Management to Support Non-Invasive Ventilation (NIV)

At the scene of an emergency, every second matters. First responders facing unconscious patients need tools that deliver quality care both quickly and efficiently. The LUBO family of devices does just that, allowing first responders to provide continuous non-invasive airway management (via a mechanical jaw-thrust). The LUBO supports non-invasive ventilation during CPR, and it can be used during mass casualty incidents (MCI).

PRODUCTS LIST & P/N

P/N	PRODUCT DESCRUPTION	PAGE NO.
VWSP-100	Ventway Sparrow	2
VWSP-1000	Ventway Sparrow Packaged	2
VWSP-1450F/1370	Patient Circuit Adult	3
VWSP-1550F/1390	Patient Circuit Pediatric	3
VWSP-580	Oxygen Mixer	3
VWSP-304	Oxygen Enrichment Kit	4
VWSP-590	DISS-DISS Oxygen Tube (green)	4
VWSP-591	DISS-DISS Oxygen Tube (white)	4
VWSP-592	DISS-DIN Oxygen Tube (white)	4
VWSP-593	DISS-AGA Oxygen Tube (white)	4
VWSP-929	DC Cable - Without Input Terminal	5
VWSP-141	AC/DC Power Adaptor	5
VWSP-142	DC/DC Car Power Adaptor	5
VWSP-420	Rechargeable Battery	6
VWSP-430	Non-Rechargeable Battery	6
VWSP-305	HME Filter	7
VWSP-306	Bacterial/Viral Filter	7
VWSP-810	Filter Pack	7
VWSP-920	Hard Carrying Bag	8
VWSP-910	Soft Carrying Bag	8
VWMNT-200	Mounting System for Ventway Sparrow	8 2 2
INV-02-000-IT-7040-02	Lubo	9
INV-03-000-IT-7040-01	Mini Lubo	9



ULTRA PORTABLE TURBINE VENTILATOR EMS

Distributed by

SOVEREIGN MEDICAL, INC

620H Valley Forge RD, Hillsborough, NC 27278 919-644-1113 sovmed.com